



INSTRUCTIONS FOR INSTALLATION OF TUBULAR LOCKSETS OR LEVERSETS


ADJUSTABLE LATCH FOR 60MM AND 70MM BACKSET

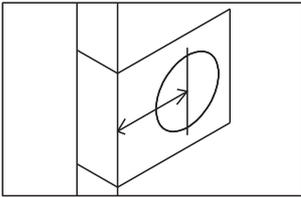



Backset is the distance from the door edge to the center of the hole on door face. Some locks are supplied with adjustable latch which can fit 60mm or 70mm backset. Just follow the steps shown below to change backset:

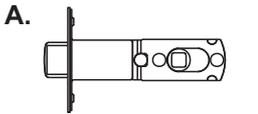

A. This latch is set for 60mm backset.




B. Keep spindle cam in correct position as illustrated. Pull spindle cam all the way to the right.

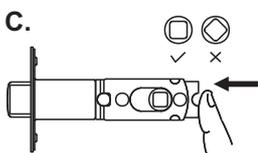


C. Your latch is now set for 70mm backset. To reset 60mm backset, just push spindle cam back to left side.

LATCH FACE PLATE


Some locks are supplied with 4-way latch which can fit mortise in or drive in.



A. This latch is for mortise in.




B. Rotate latch face clockwise 20° and pull out latch face.




C. This latch is for drive in.

1. MARK DOOR WITH TEMPLATE

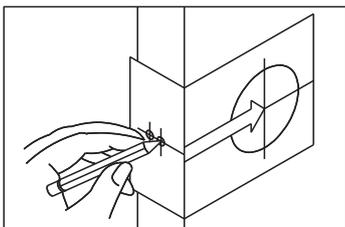

Select 60mm or 70mm backset as desired and mark centre of hole on door face using supplied template.


2. DRILL HOLES

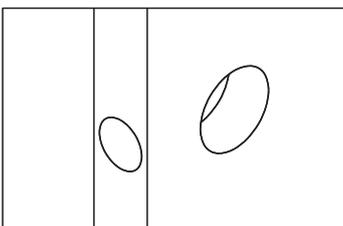


- A. Drill 54mm hole on door face, from both sides to avoid wood splitting.
- B. Drill 25mm hole for latch. (refer step 3c for drive-in latch)

3. INSTALL LATCH


A. Insert latch in hole, mark outline of faceplate and chisel 4mm deep.

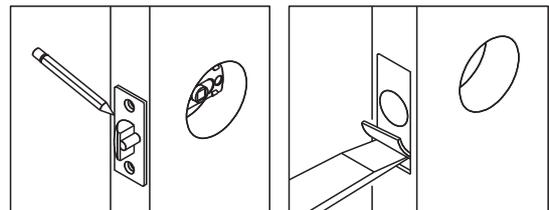

B. Insert latch and tighten screws.

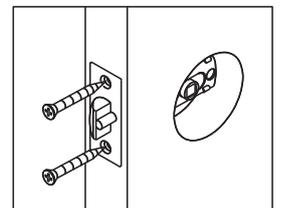


C. For drive in latch, drill 24.6mm hole (31/32") and press latch until it is flush with door edge.

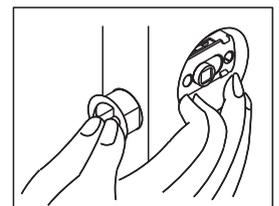


4. INSTALL OUTSIDE KNOB (OR LEVER)

Insert spindle through latch.
 Press flush against door.
 (NOTE: Key hole must be in down position)

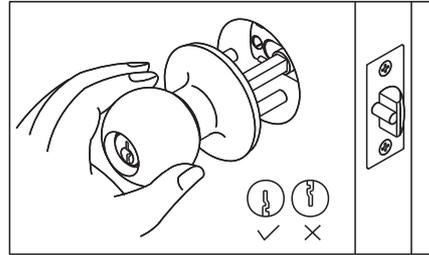


5. INSTALL INSIDE KNOB (OR LEVER)

Install inside knob (or lever) and tighten screws until lock is firm.

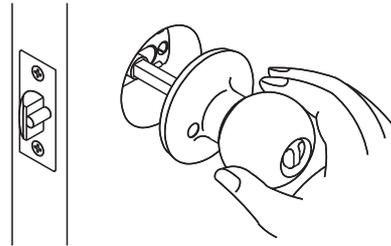


6. INSTALL STRIKE


A. Close door to mark horizontal center line of strike.

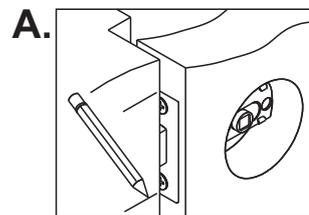


B. Measure one half of door thickness from door stop and mark vertical center line of strike.
 Drill 25mm hole 13mm deep at intersection of horizontal and vertical line of strike
 Match screw holes on strike with centre line on jamb.
 Mark outline using strike plate and chisel 1.6mm deep for strike.

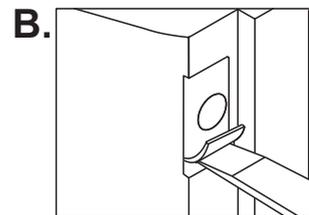

C. Install strike and tighten screws.

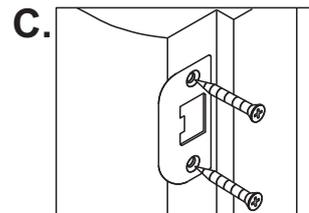

TEMPLATE



Mark $\varnothing 25\text{mm}$ hole at centre of door edge.

